



Installation instructions

Akrapovič Exhaust System:

Evolution Line

for the

Mercedes AMG A45 / A45 S (W177)

Mercedes AMG CLA45 / CLA45 S (C118/X118)

Mercedes AMG GLA45 (H247)



ENGLISH

Version 1.0

10/2021

www.akrapovic.com

D249.1.00.0000 D



Installation instructions

Akrapovič Exhaust System:

Evolution Line

for the

Mercedes AMG A45 / A45 S (W177)

Mercedes AMG CLA45 / CLA45 S (C118/X118)

Mercedes AMG GLA45 (H247)

ENGLISH

Version 1.0

10/2021

www.akrapovic.com

Congratulations on purchasing the Akrapovič product. The Akrapovič product is made by Akrapovič d.d., Malo Hudo 8a, 1295 Ivančna Gorica, Slovenia ("Akrapovič").

Please read this entire installation manual carefully prior to installing and using the Akrapovič product.

Akrapovič product should only be installed by persons skilled in car exhaust system or other car parts installation and performance. The instructions provided in this manual should be followed to ensure proper installation and safe use of the Akrapovič product. Akrapovič and/or its partners shall not be held liable for any damage or personal injury (including direct, indirect, or consequential damage) sustained as a result of improper installation of the Akrapovič product or its use and maintenance contrary to the instructions and warnings contained herein.

If you have any questions regarding the installation and/or proper use of the Akrapovič product or this manual, please contact your local Akrapovič partner.

For more information on the Akrapovič products, see the official Akrapovič website at: <http://www.akrapovic.com>

GENERAL INFORMATION

Your safety is our number one priority. Please drive your car responsibly, safely and always obey local traffic rules.

All statements made with regard to the product's compliance are made in respect of the product "as is". Any modifications of the Akrapovič product or its improper installation, use or maintenance that is not in accordance with this Installation manual, may result in severe damage to the product, vehicle and/ or engine, as well as personal injury, and may affect the product's compliance with the legal requirements, such as product's air and/ or noise emissions (as an example, the car may not be suitable for use on public roads any longer), as well as warranty coverage.

The product may only be used in accordance with relevant laws and regulations, including state and federal, where applicable.

Damage caused by improper installation, use and maintenance of the Akrapovič product is not covered by the Akrapovič warranty. Please refer to the enclosed warranty with regard to the terms of our warranty.

Technical specifications of Akrapovič products are subject to change without notice.

COPYRIGHT AND OTHER RIGHTS NOTICE

The Akrapovič trademark, including corporate logos and emblems, are subject to copyright as well as trademark rights of Akrapovič, its licensors, or third persons authorizing Akrapovič to use them.

Any reproduction, technical or other manipulation, translation, or other use of the copyright and/or trademark rights contained herein is prohibited without the explicit prior written consent of Akrapovič. The same especially applies to the entire contents of this manual and/or any of its parts, including but not limited to technical specifications, instructions, graphs, photographs, and so on included in this manual.

Akrapovič takes all copyright and other rights infringement cases under serious consideration. If you have any reason to believe that your product is not an original Akrapovič product, please contact our local partners or Akrapovič at info@akrapovic.com.

SAFETY AND COMPLIANCE WARNING, PLEASE READ CAREFULLY


BEFORE REMOVING THE STOCK PARTS AND BEGINNING THE INSTALLATION OF YOUR NEW AKRAPOVIČ PRODUCT, PLEASE MAKE SURE THAT ALL ITEMS LISTED BELOW ARE VERIFIED:

- This manual is specific to the car indicated on the cover page, for which it is designed. Installation procedures vary depending on the type of car. Please verify that the Akrapovič product and this installation manual correspond to the type of your car.
- **For exhaust system only:** the exhaust system can get extremely hot during and after it is used. Make sure not to touch the exhaust system until it is completely cool. **Allow the exhaust and engine to cool down before beginning installation.**
- Make sure the car is **securely positioned to prevent** damage to yourself and other, or the car.
- Please check the parts you received against the parts list available on our website (please use the QR code on the front page or look for “schematic view” in the respective product page on www.akrapovic.com). Make sure that you have **all the parts necessary for the installation** of your new Akrapovič product. If any of the parts is missing, please do not proceed with uninstalling your stock parts/installing the Akrapovič product and contact the retailer where you purchased the Akrapovič product.
- **For exhaust system only:** every exhaust system muffler has its unique serial number, which identifies the authenticity of the product. You can find the serial number on the muffler's sleeve. Please refer to the **picture 1**. Please verify that your exhaust system is an original Akrapovič product. If you have any doubts, please contact the reseller where you purchased the exhaust system or Akrapovič partners. This manual, any certificates and Akrapovič warranty apply to original products only.

GENERAL NOTE

Photographs and other illustrations in this manual are symbolic and are intended to help represent individual steps for proper installation and use, as well as for a general overview. The actual component parts of the Akrapovič product may not entirely correspond to the photographs and other illustrations.

Picture 1 - EXAMPLE OF SERIAL NUMBER POSITION:

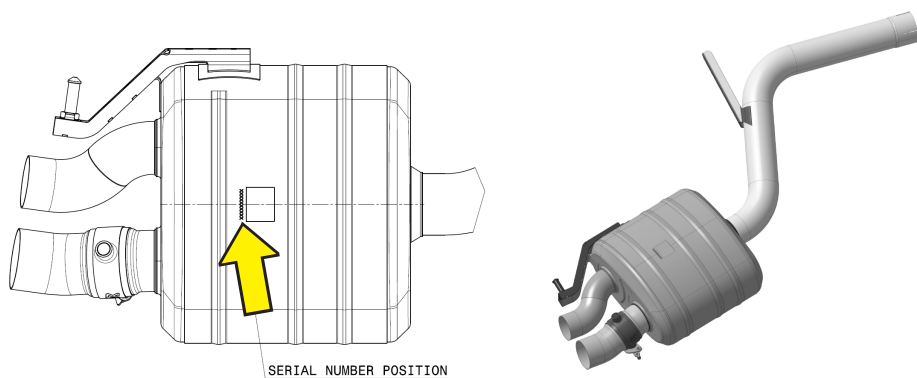

NOISE AND EMISSION WARNINGS

General warning

Because of the world-wide distribution of Akrapovič d.d. products, neither Akrapovič d.d. nor any of its subsidiaries make any representation that the products comply with the air and/or noise emissions laws, or labeling laws, of any jurisdiction. The purchasers are entirely responsible for informing themselves of the applicable laws where the products are to be used and to comply with those law.

Although legal compliance of Akrapovič products in a specific country should be determined by the user, you can find some basic guidance on compliance of your Akrapovič product with various legal requirements on the product-related part of our website (please use the QR code on the front page or look for the respective product page on www.akrapovic.com). For EC and ECE type approvals, please refer to the certificate enclosed to your product.

USA WARNING

Various U.S. states and the U.S. federal government have individual laws regulating the use of aftermarket parts and systems, especially as those parts and systems modify, remove, or replace original equipment catalysts. Please consult the appropriate laws in your area before installing any aftermarket part or system on your vehicle to ensure compliance with all applicable laws. Neither Akrapovic d.d. nor any of their subsidiaries or the sellers of the parts or systems make any representation that any of their parts or systems comply with any such laws.

CALIFORNIA WARNING

California laws prohibit the use of any aftermarket part or system that modifies, removes or replaces original equipment catalysts unless the California Air Resources Board has issued an Executive Order regarding such part or system or unless the part or system is exempted by being used only on racing vehicles on closed courses. Neither Akrapovic d.d. nor any of their subsidiaries make any representation that any of their parts or systems has received such an Executive Order or that any of their parts or systems conform with the racing vehicles exemption. The purchasers are entirely responsible for informing themselves of applicable California laws and to comply with those laws.

SYMBOLS

The following symbols are used throughout these installation instructions:



**TOOLS AND PROTECTIVE
EQUIPMENT REQUIRED**



TIGHTENING TORQUE



LUBRICATION



HAND TIGHTEN



INSTALLATION TIP



CAUTION OR IMPORTANT

USE BOLT SEALANT



Apply 3 to 4 small drops of bolt sealant onto the cleaned and degreased threads before tightening the bolts.

WARNING! Avoid contact with skin, eyes and mucous membranes. Do not inhale fumes. Keep out of reach of children.

USE ANTI-SEIZE LEAD-FREE COPPER PASTE (black tube)




Provides trouble-free and long-lasting protection against seizing, corrosion and rusting of bolts, threaded ends, nuts, joints, etc. Also protects against vibration, wear and impact. **WARNING! Avoid eye contact. Keep out of reach of children.**

USE ANTI-SEIZING GREASE (white tube)



Prevents seizing, corrosion and excessive wear between the titanium components. **WARNING! Avoid eye contact. Keep out of reach of children.**



- Mechanic gloves
- T-handle 8 mm wrench
- T-handle 10 mm wrench
- Torx 23
- Torx E9
- Torx E10
- Torx E12
- Torx E14
- T-handle swivelling 10 mm wrench
- Combination 13 mm wrench
- Combination 15 mm wrench
- Combination 16 mm wrench
- Combination 19 mm wrench
- Socket 11 mm
- Long Socket 10 mm
- Long Socket 16 mm
- Flat screwdriver
- Cross head screw driver
- Rubber bracket unhooking tool

PARTS LIST

The packaging box should contain one or more of the following items:

- Akrapovič product
- Homologation certificate/ compliance documents if applicable
- Warranty
- Fitting material
- Installation Manual

Detailed list of parts can be found on the Akrapovič website (please use the QR code on the front page or look for “Schematic view” in the respective product page on www.akrapovic.com).

IMPORTANT: The car should be in the off position throughout the dismantling and installation process, as well as any other work done on the Akrapovič product!

REMOVAL OF STOCK EXHAUST SYSTEM OR OTHER VEHICLE'S STOCK PARTS:

The process of uninstalling the original exhaust system or other parts may vary depending on the existing exhaust system or other vehicle parts. Please follow the original vehicle manufacturer's workshop manual for uninstalling the original exhaust system or other parts.

If you for any reason decide otherwise, please note that any information provided in this respect herein should be considered as general information provided for your convenience only. Akrapovič shall not assume any liability or responsibility with regard to uninstalling your existing exhaust system or other parts, warranty coverage of such exhaust system or other parts vehicle or their further fitness for use.

In case your Akrapovič exhaust system or other vehicle parts may not be used on certain roads or under certain conditions, please keep the stock (or other) exhaust system or other parts that you can use in such circumstances legally.


REMOVAL OF STOCK EXHAUST SYSTEM:

Put the vehicle onto a car lift.


! **CAUTION:** ensure that the car is lifted safely and properly in order to avoid the risk of vehicle damage, injury, or even death!

1. **FOR AMG A45 / A45 S and AMG CLA45 / CLA45 S model only;** unscrew the marked bolts, undo the plastic fasteners and carefully remove both part of the diffuser off the vehicle (**F 01, 02**).

! **CAUTION:** make sure not to injure yourself or damage any part of the vehicle during this process!

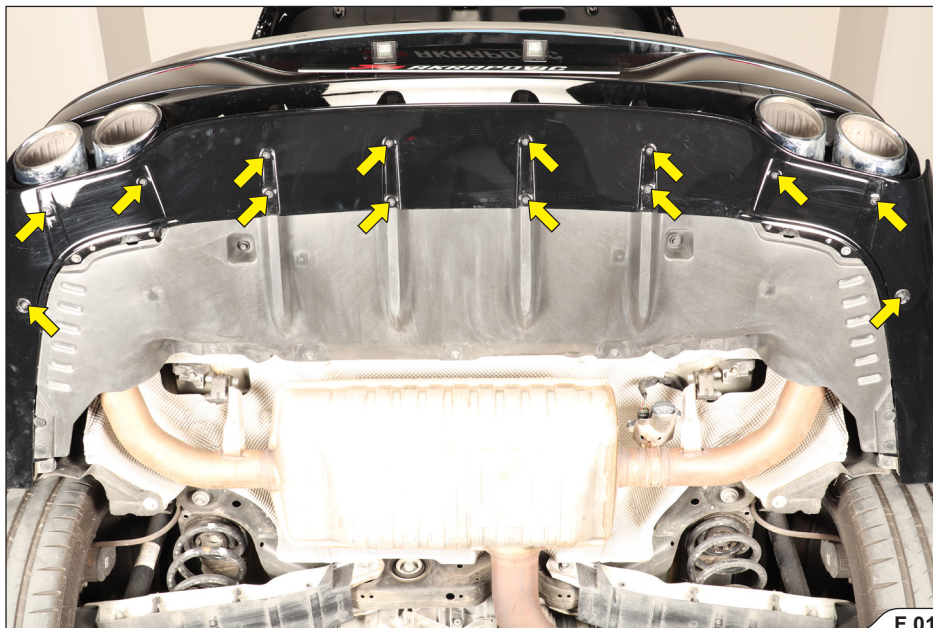

F 01

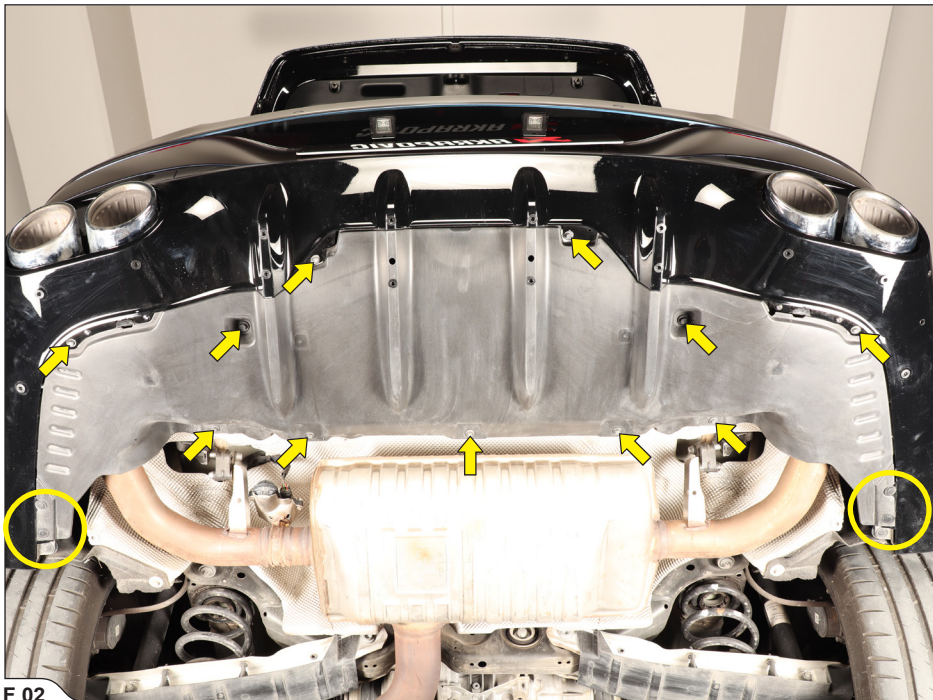

F 02

2. **FOR AMG A45 / A45 S and AMG CLA45 / CLA45 S model only;** unscrew marked bolts, undo the plastic fasteners on both sides of the vehicle and partially remove both wheel arches off the vehicle (F 03).


! CAUTION: make sure not to injure yourself or damage any part of the vehicle during this process!



F 03

3. **FOR AMG A45 / A45 S and AMG CLA45 / CLA45 S model only;** unscrew marked bolts and undo the plastic fasteners on both sides of the vehicle (F 04).


! CAUTION: make sure not to injure yourself or damage any part of the vehicle during this process!

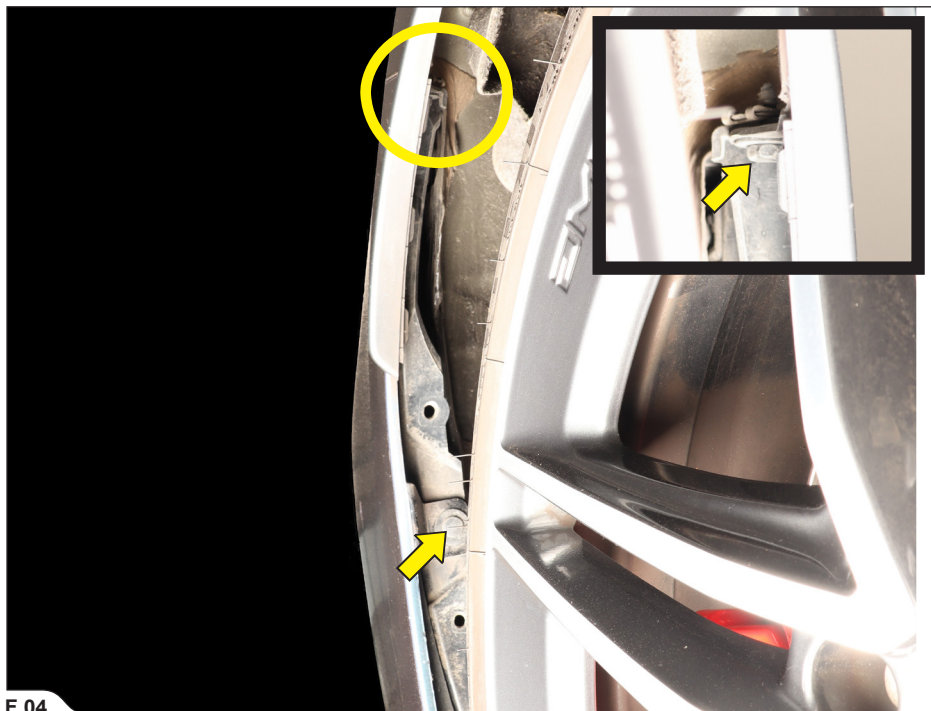

F 04

4. Open the trunk, undo the plastic fasteners, remove the trunk floor panel and trunk trim panel (F 05, 06).

! **CAUTION:** make sure not to injure yourself or damage any part of the vehicle during this process!

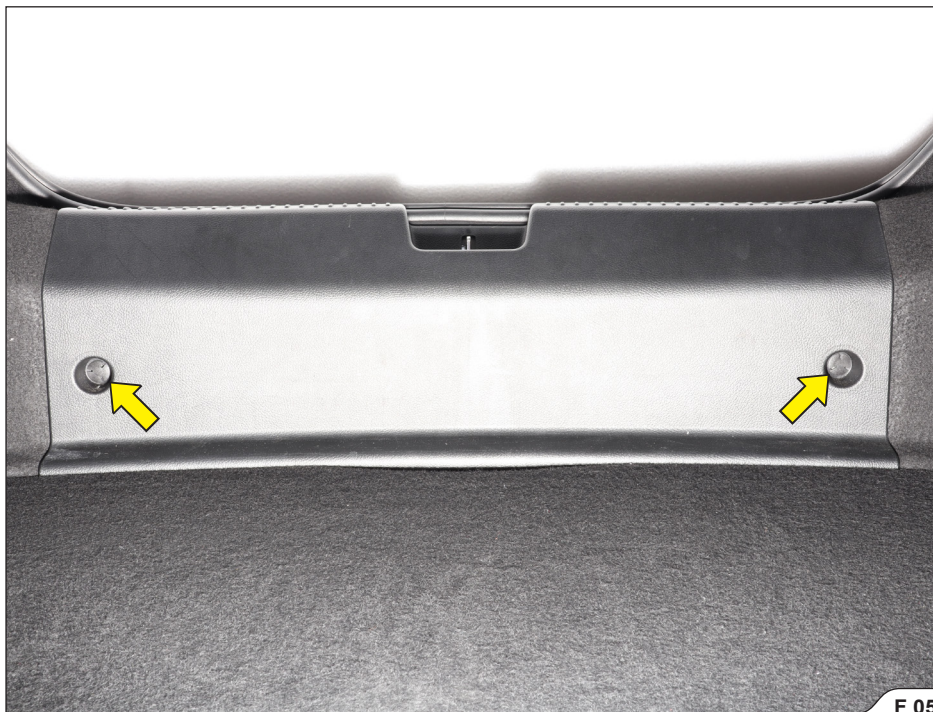

F 05



F 06

5. For AMG GLA 45 model only; unscrew marked nuts and partially remove the control module (F 07).


! CAUTION: make sure not to injure yourself or damage any part of the vehicle during this process!



F 07

6. **For AMG GLA 45 model only;** unscrew marked nuts and remove the plastic toll box off the trunk (F 08).


! **CAUTION:** make sure not to injure yourself or damage any part of the vehicle during this process!

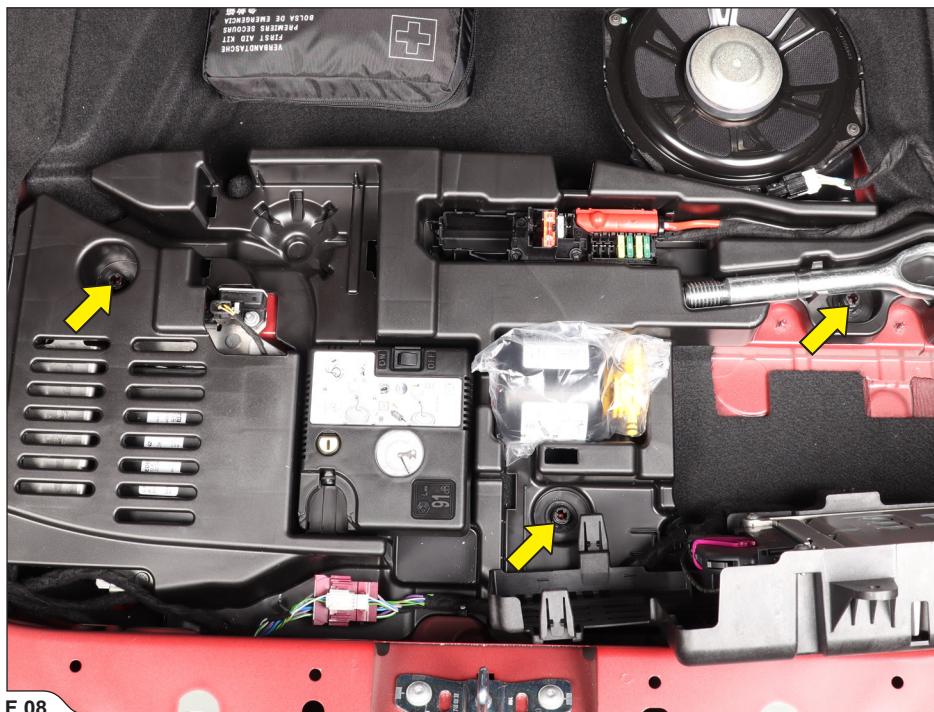


F 08

7. **FOR AMG A45 / A45 S and AMG CLA45 / CLA45 S model only;** remove the marked rubber grommets and unscrew marked nuts (**F 09, 10**).

! **CAUTION:** make sure not to injure yourself or damage any part of the vehicle during this process!

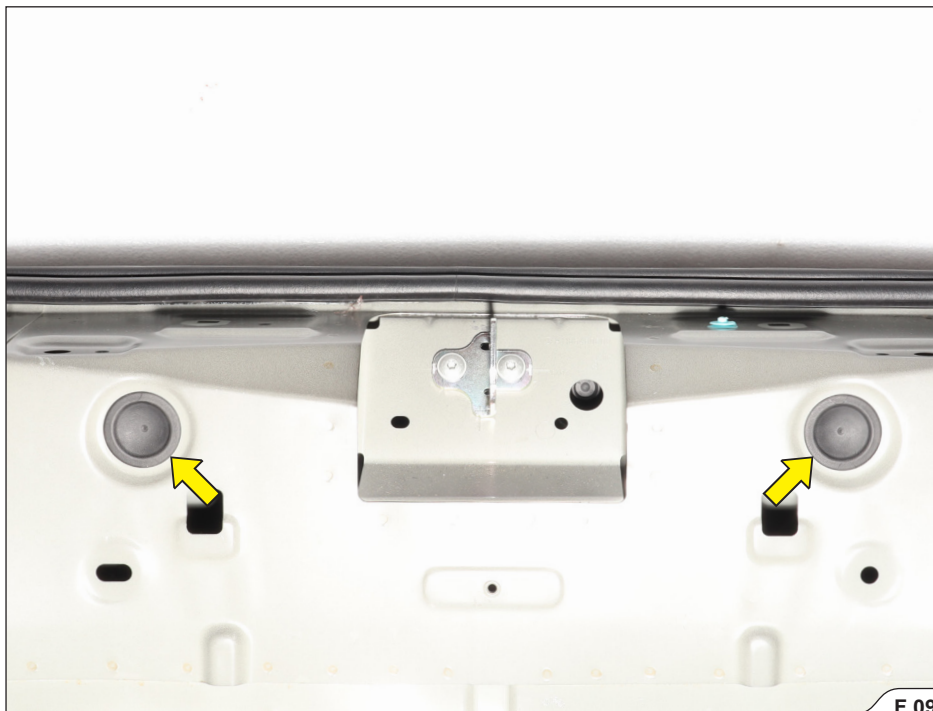


F 09

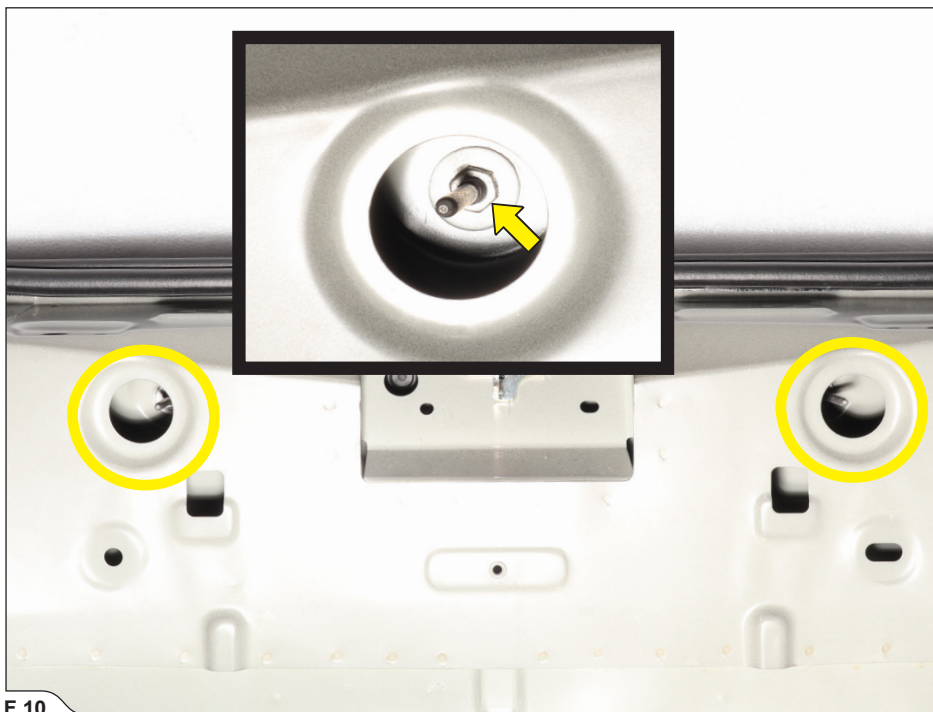

F 10

8. **FOR AMG A45 / A45 S and AMG CLA45 / CLA45 S model only;** partially remove the rear bumper, disconnect the bumper's connectors and remove the bumper off the vehicle (F 11).


! **CAUTION:** make sure not to injure yourself or damage any part of the vehicle during this process!

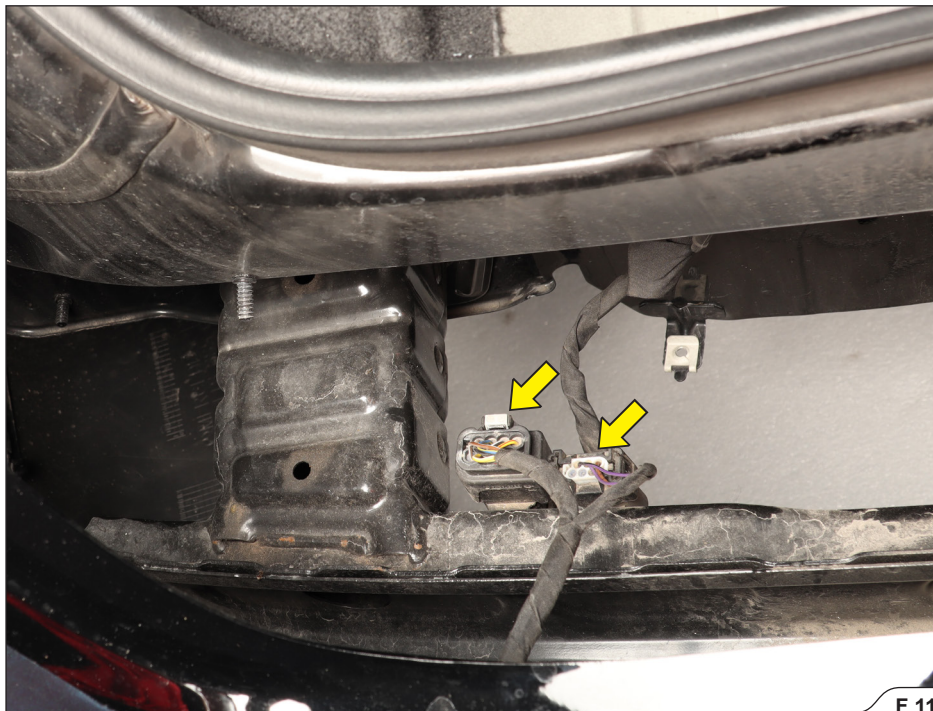

F 11

9. **FOR AMG A45 / A45 S and AMG CLA45 / CLA45 S model only;** drill the marked rivets, undo the plastic pin and carefully remove the tail pipe's out of the bumper; repeat the procedure on both sides of the vehicle (F 12).

! **CAUTION:** make sure not to injure yourself or damage any part of the vehicle during this process!

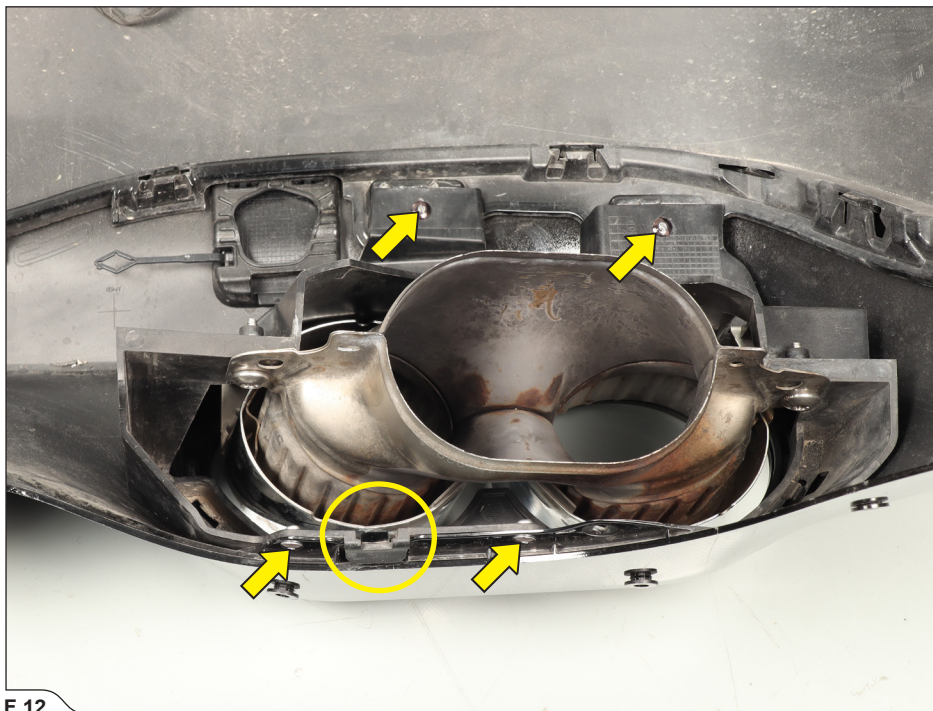

F 12

10. **FOR AMG A45 / A45 S and AMG CLA45 / CLA45 S model only;** undo the plastic pins and carefully remove the tail pipe's cover (F 13).

! CAUTION: make sure not to injure yourself or damage any part of the vehicle during this process!




F 13

11. **FOR AMG A45 / A45 S and AMG CLA45 / CLA45 S model only;** unscrew marked bolts and undo the plastic pins; carefully remove the tail pipes out of the tail pipes housing; repeat the procedure on both tail pipes (F 14, 15).

! **CAUTION:** make sure not to injure yourself or damage any part of the vehicle during this process!



F 14

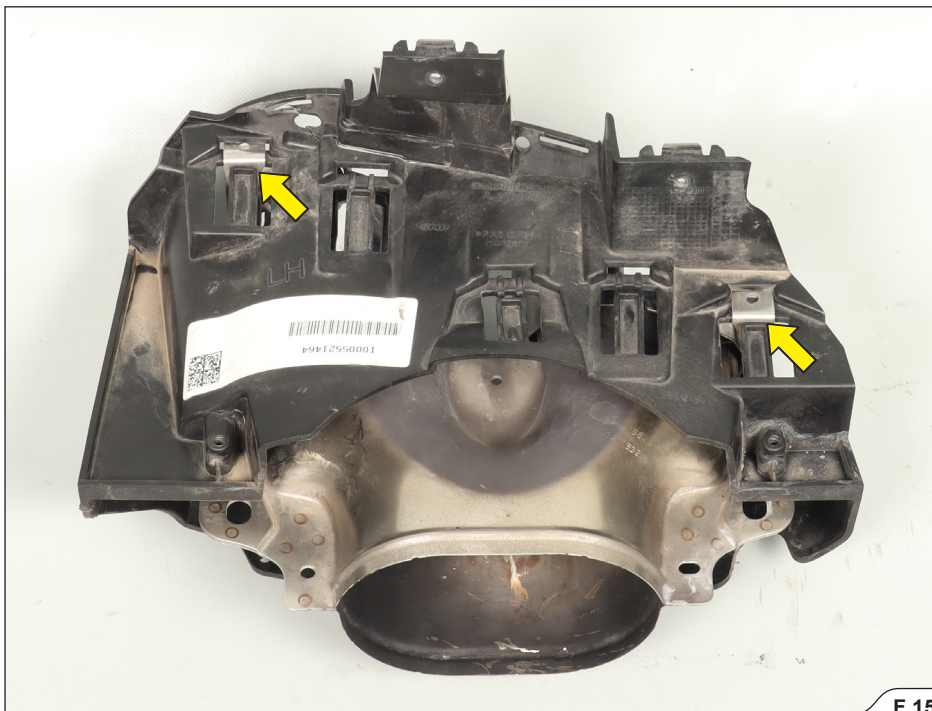


12. **For AMG GLA 45 model only;** unscrew marked bolts and carefully remove the tail pipes off the vehicle (F 16, 17).

! **CAUTION:** make sure not to injure yourself or damage any part of the vehicle during this process!



F 16

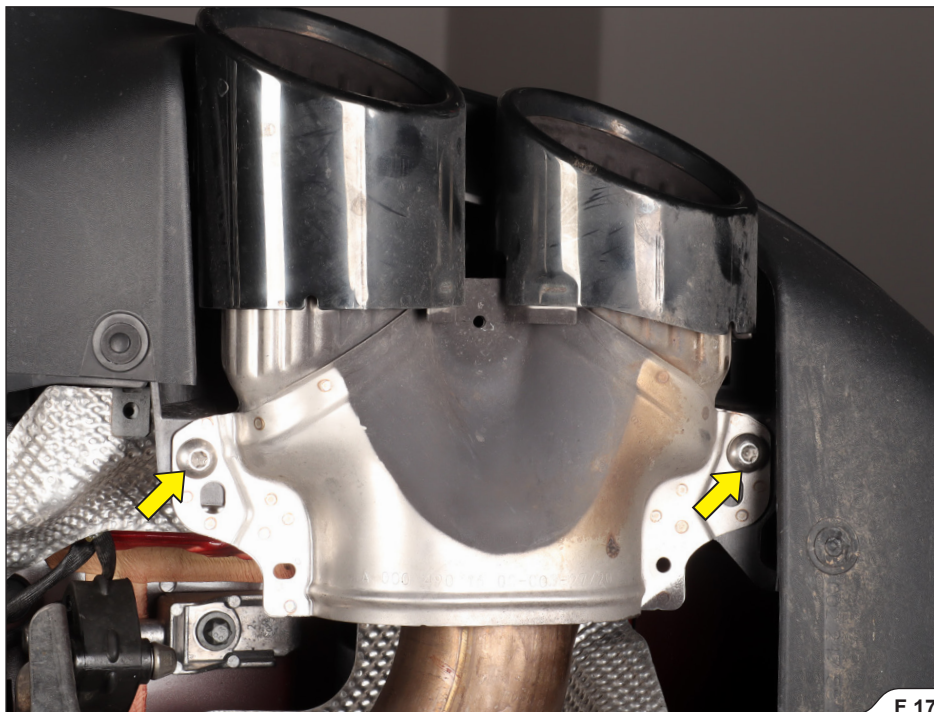

F 17

13. Unscrew marked back pressure sensors connection (F 18).


! **CAUTION:** make sure not to injure yourself or damage any part of the vehicle during this process!



F 18

14. Unscrew marked bolts, undo marked plastic fasteners and partially remove the under-floor panels (F 19).

! CAUTION: make sure not to injure yourself or damage any part of the vehicle during this process!

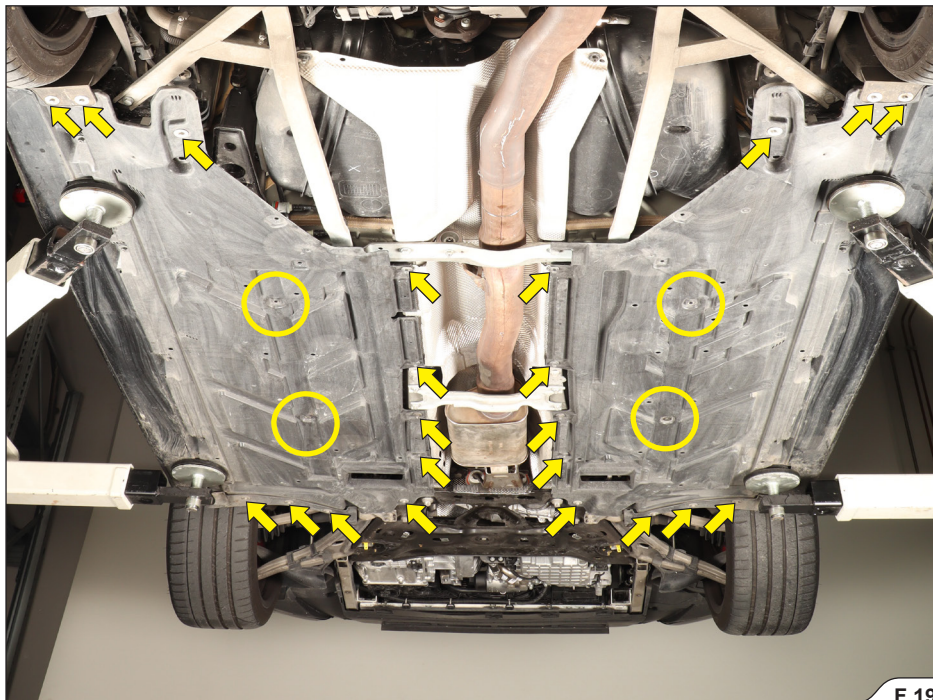


F 19

15. Unscrew marked bolts and remove the chassis reinforcements off the vehicle (F 20).


! **INSTALLATION TIP:** for easier dismounting, lubricate the original rubber brackets (WD40®)*.

*WD-40® is a trademark of the WD-40 Company.

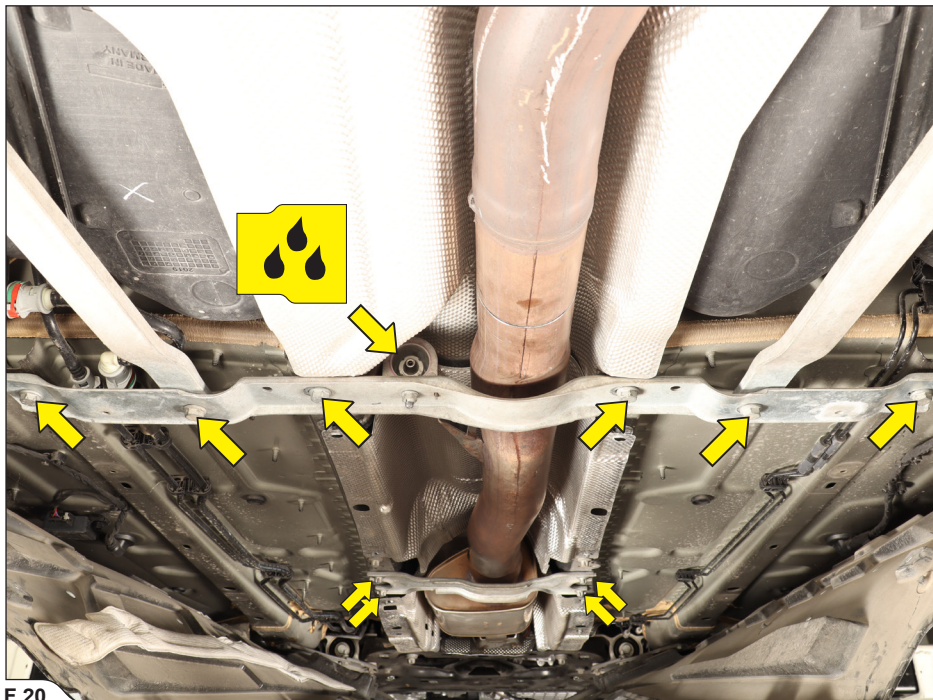

F 20

16. Unscrew marked nuts and unscrew the marked clamp; move the clamp off the joint (F 21, 22).
! CAUTION: make sure not to injure yourself or damage any part of the vehicle during this process!

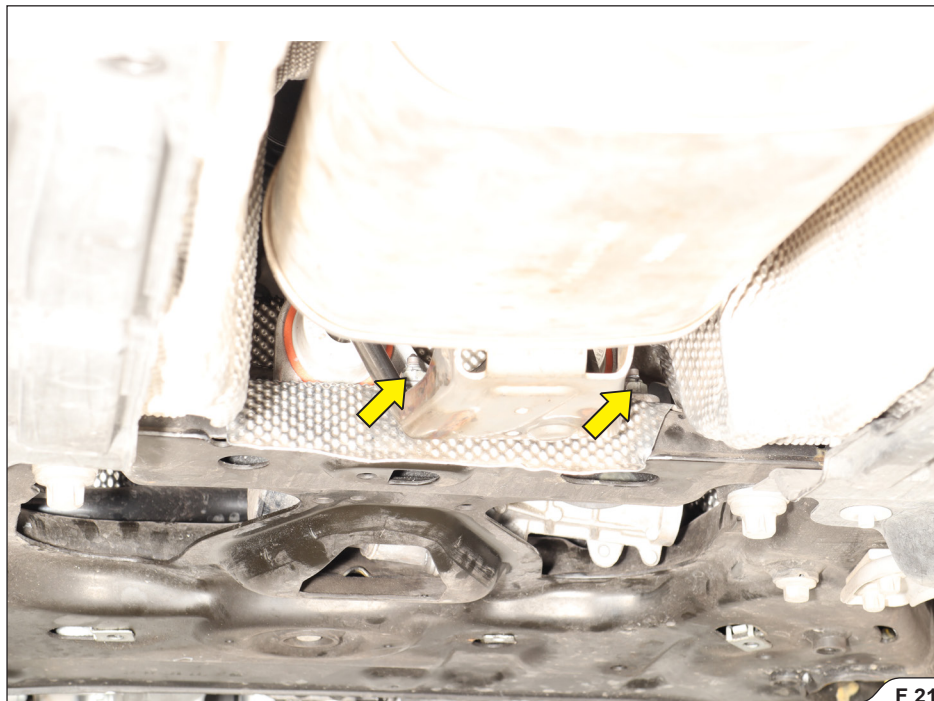


F 21




F 22

- Support the exhaust system, disconnect exhaust flap actuator, unscrew both muffler's rubber brackets, and carefully remove the system off the vehicle (F 23, 24).

! **CAUTION:** make sure not to injure yourself or damage any part of the vehicle during this process!

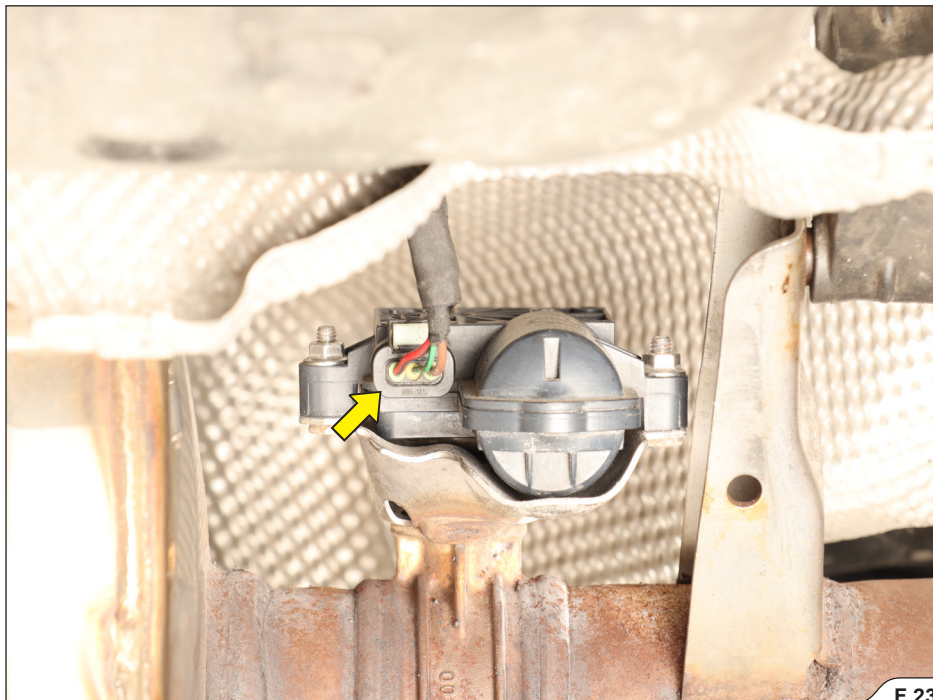

F 23

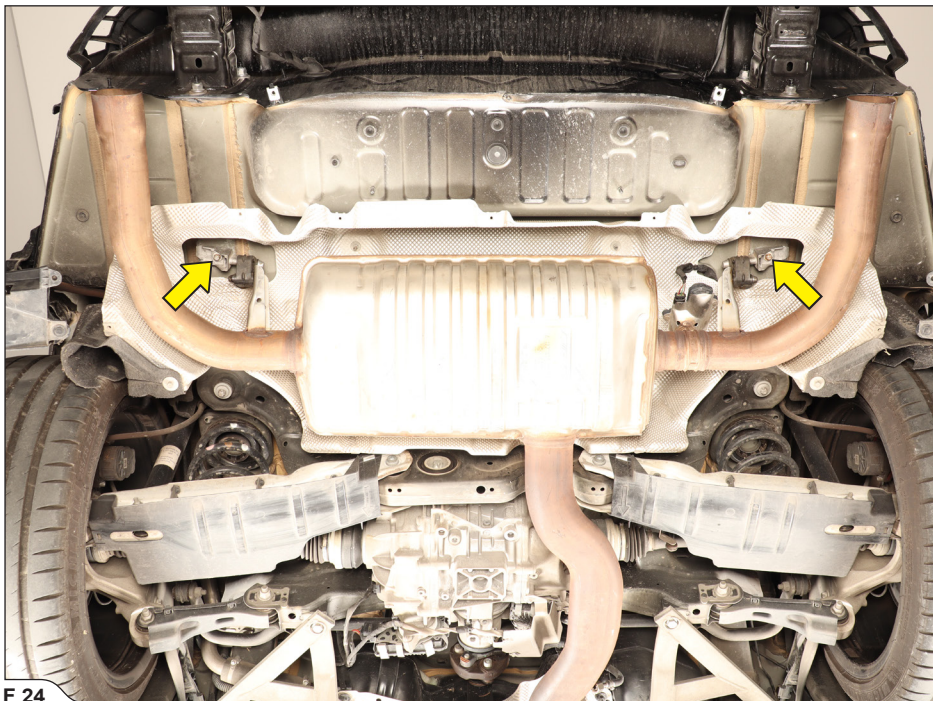

F 24

18. Remove all stock rubber brackets off the stock exhaust system (F 25, 26).

! **INSTALLATION TIP:** for easier dismounting, lubricate the original rubber brackets (WD40®)*.

*WD-40® is a trademark of the WD-40 Company.




F 25



F 26

19. **FOR AMG A45 / A45 S and AMG CLA45 / CLA45 S model only;** Remove the marked rubber grommet (F 27).

! **CAUTION:** make sure not to injure yourself or damage any part of the vehicle during this process!

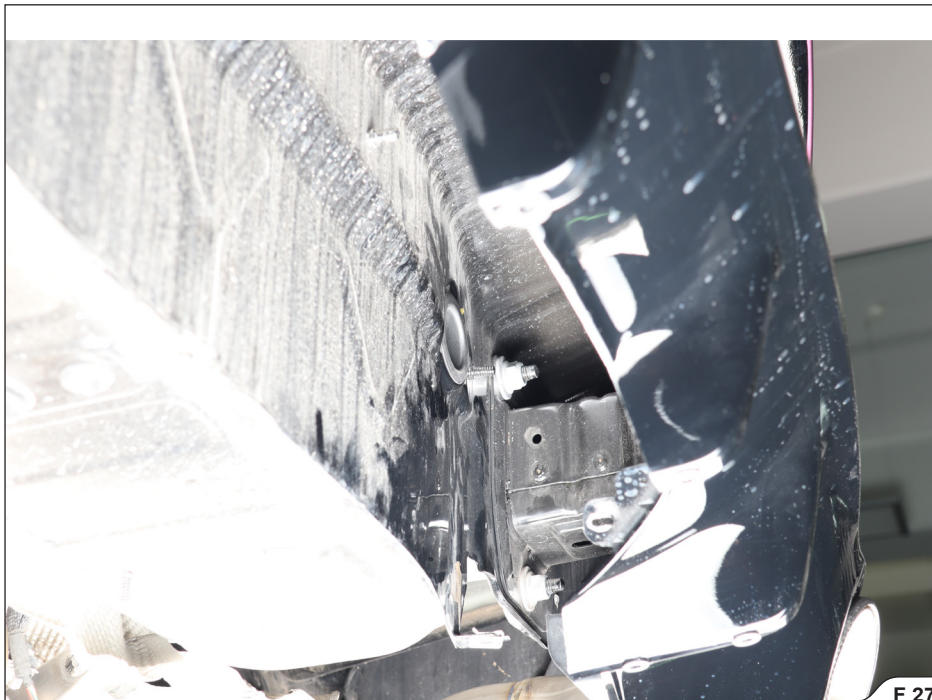

F 27

INSTALLATION OF THE AKRAPOVIČ EXHAUST SYSTEM:

1. **FOR AMG A45 / A45 S and AMG CLA45 / CLA45 S model only;** Prepare the actuators wiring and install it onto the vehicle as shown (F 28, 29, 30).
- ! **CAUTION:** make sure not to injure yourself or damage any part of the vehicle during this process!




F 28






F 30

2. **For AMG GLA 45 model only;** carefully cut off the rubber grommet of the actuator wiring (**F 31**).
! **IMPORTANT:** make sure not to damage the wires during this process!

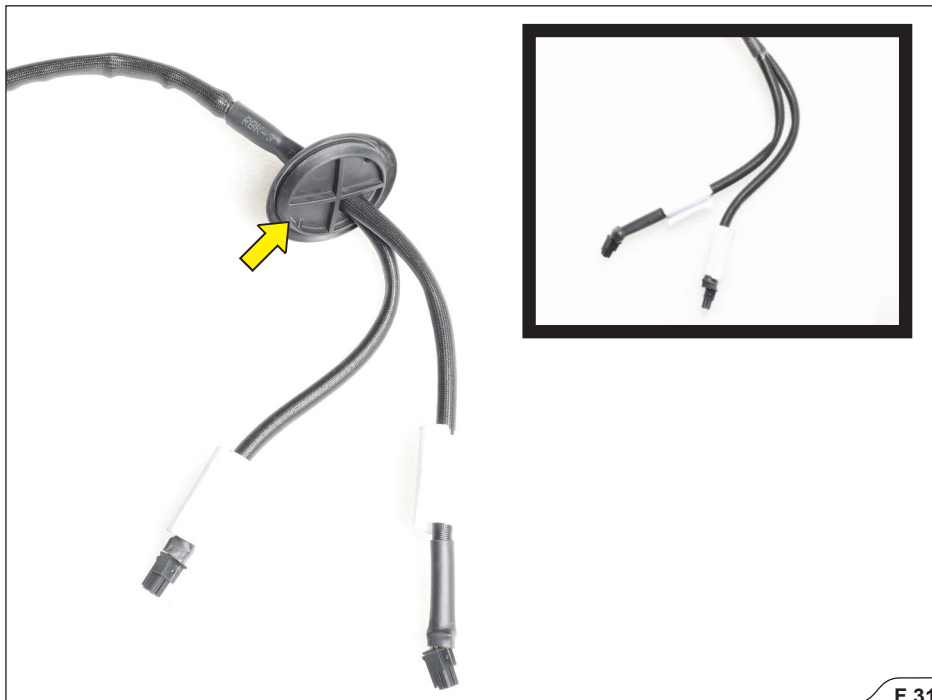

3. **For AMG GLA 45 model only**; unplug the stock rubber grommet, carefully puncture a hole thru the stock grommet and install the actuators wiring as shown than plug the stock grommet back to its place (F 32, 33, 34).

! **IMPORTANT:** make sure to secure all Control Kit components in such a way, that they won't touch any hot or moving parts of the vehicle!

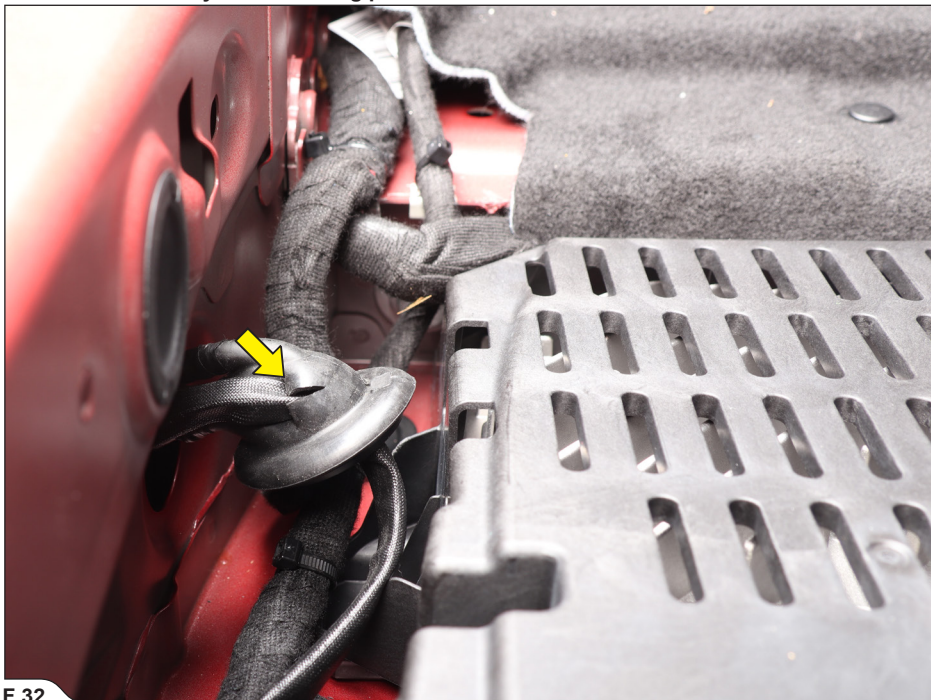

F 32




F 33



F 34


- Carefully separate the marked **Purple** and **White Purple** wires from the marked stock harness as shown (F 35).

! **IMPORTANT:** make sure not to damage the wires during this process!

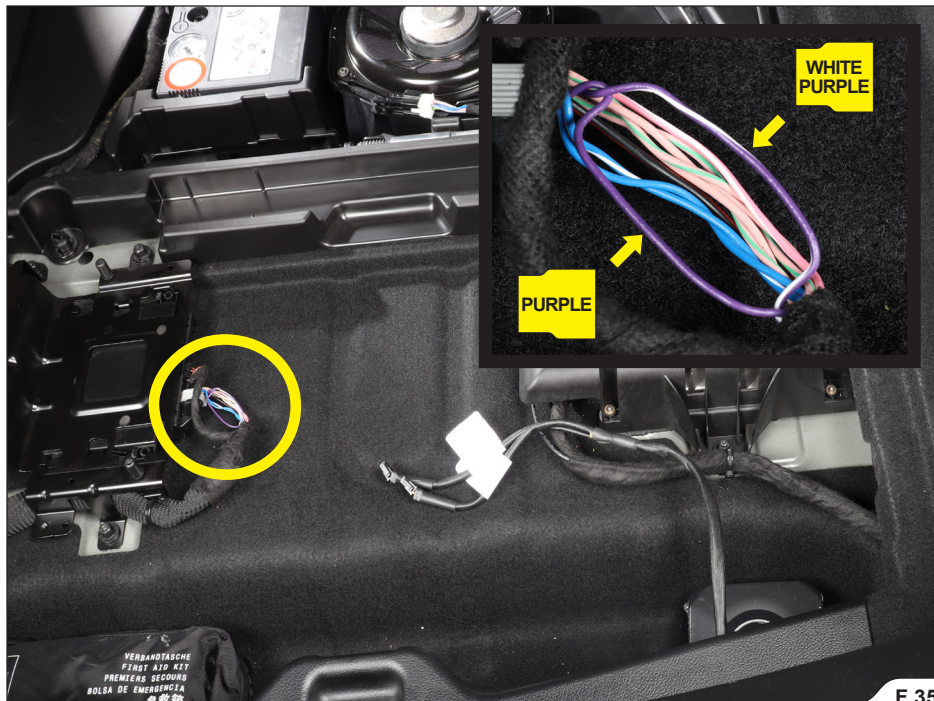

5. **FOR AMG A45 / A45 S and AMG CLA45 / CLA45 S model only;** install and connect the Control kit components in the trunk, as shown; secure all wiring and components in place using tie wraps from Akrapovič installation kit (F 36).


! **IMPORTANT:** make sure to secure all Control Kit components in such a way, that they won't touch any hot or moving parts of the vehicle!

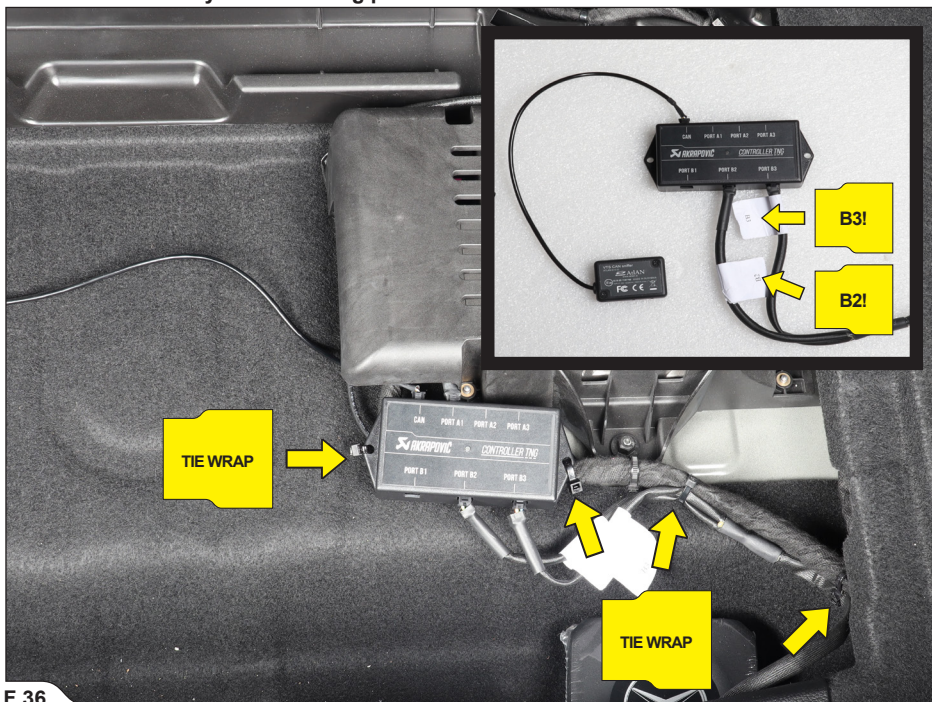


F 36

6. Unscrew the CAN sniffer's cover, lead the **Purple** and **White-purple** wires through the CAN sniffer's wire grooves as shown, reinstall the cover and secure the TNG controller in place, using tie wraps from Akrapovič installation kit (**F 37, 38**).

! **IMPORTANT:** make sure not to damage the wires during this process!

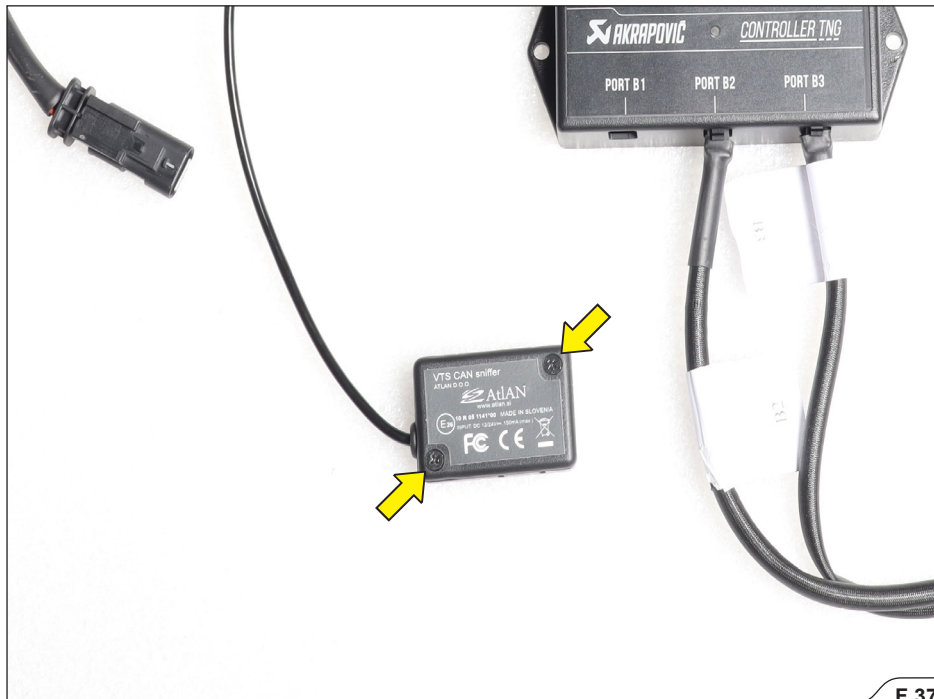


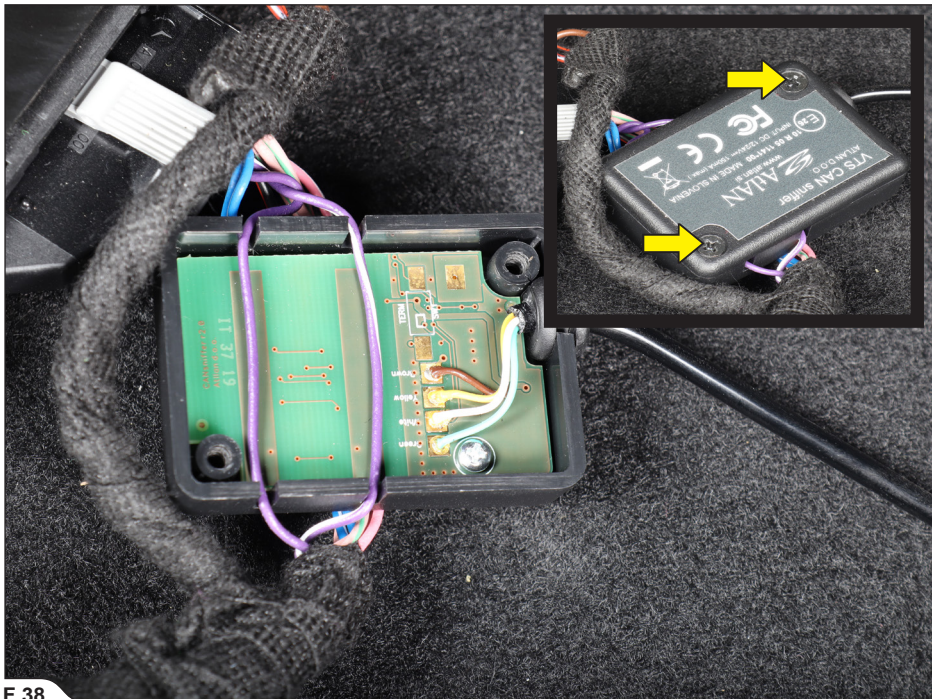

F 38


7. **For AMG GLA 45 model only;** reinstall the plastic toll box into the trunk; check vehicle workshop manual for correct procedures and tightening torques (F 39).

! **CAUTION:** make sure not to injure yourself or damage any part of the vehicle during this process!

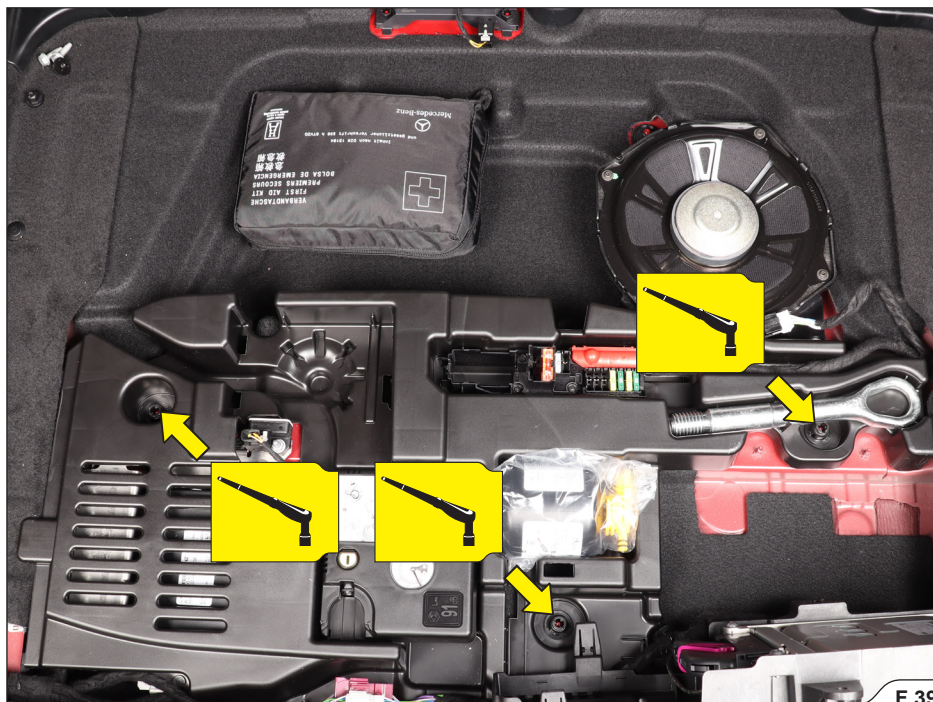

8. **For AMG GLA 45 model only**; reinstall the control module; check vehicle workshop manual for correct procedures and tightening torques (F 40).


! **CAUTION:** make sure not to injure yourself or damage any part of the vehicle during this process!

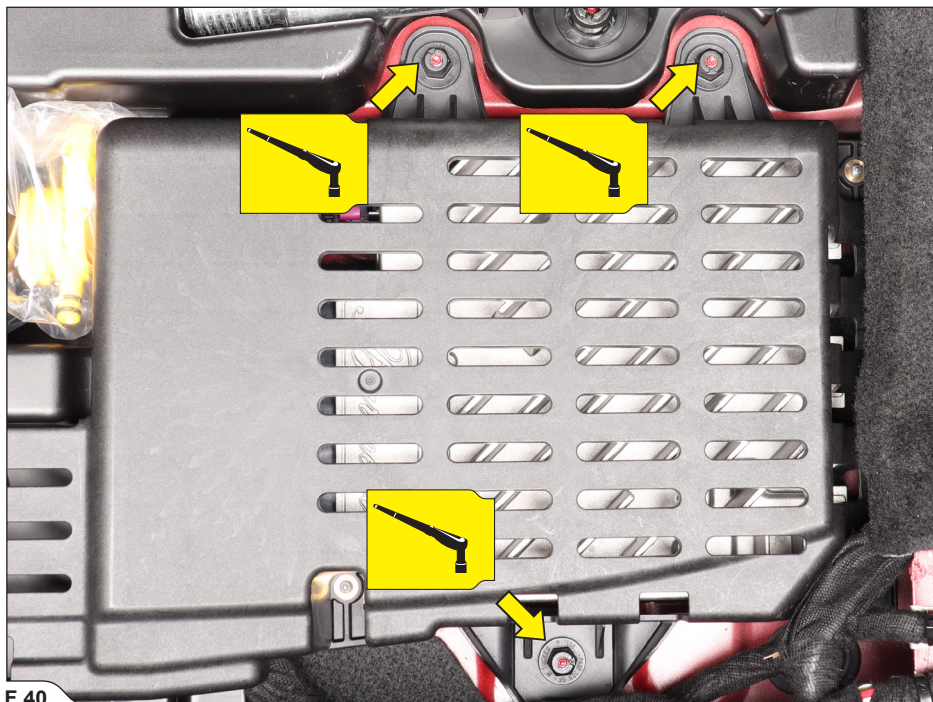

F 40

9. **For AMG GLA 45 model only**; install and connect the Control kit components in the trunk, as shown; secure all wiring and components in place using tie wraps from Akrapovič installation kit (F 41).


! **IMPORTANT:** make sure to secure all Control Kit components in such a way, that they won't touch any hot or moving parts of the vehicle!

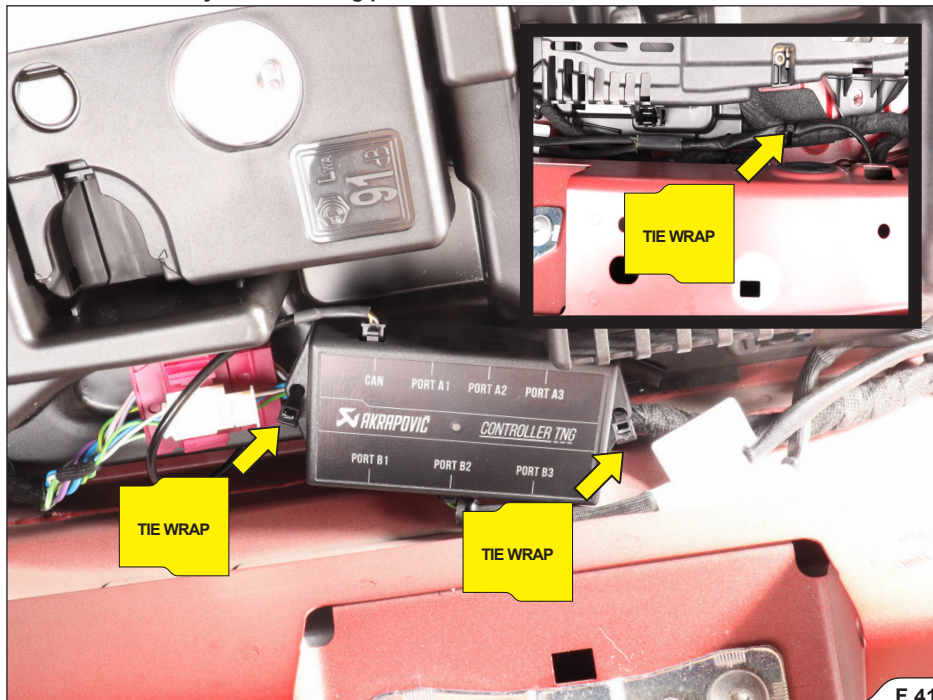

10. Mount stock rubber bracket on Akrapovič link-pipe as shown (F 42).

✂ INSTALLATION TIP: for easier mounting, lubricate the original rubber bracket (WD40®)*.


*WD-40® is a trademark of the WD-40 Company.

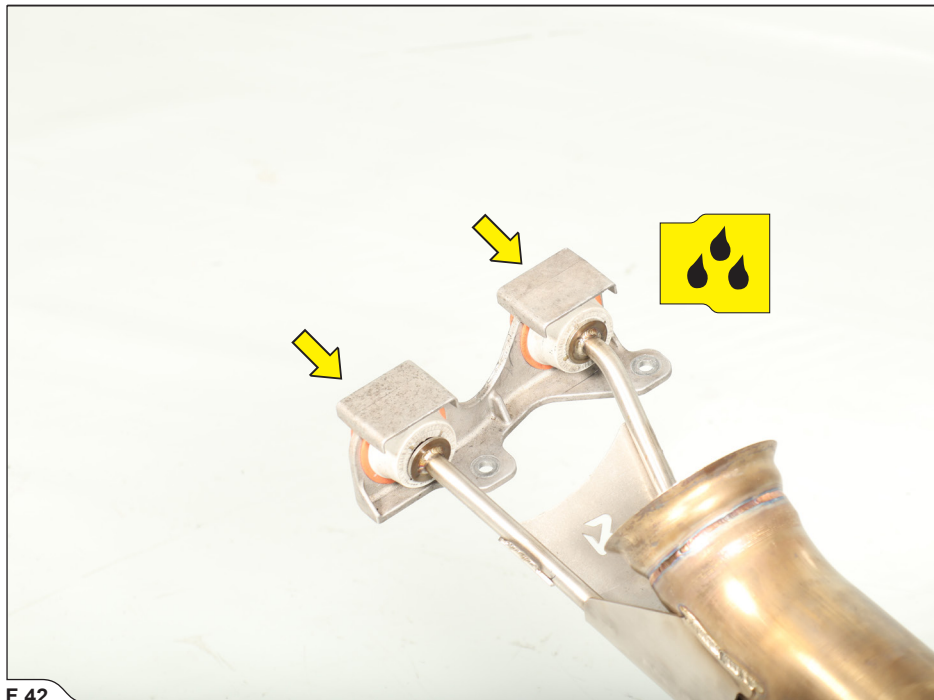


F 42

11. Mount Akrapovič link-pipe onto stock flexible pipe (using, stock clamp and stock nuts) and install the chassis reinforcements back on the chassis; check vehicle manufacturer manual for correct procedures and tightening torques (F 43, 44).

✂ **INSTALLATION TIP: for easier mounting, lubricate the original rubber bracket (WD40®)*.**
*WD-40® is a trademark of the WD-40 Company.

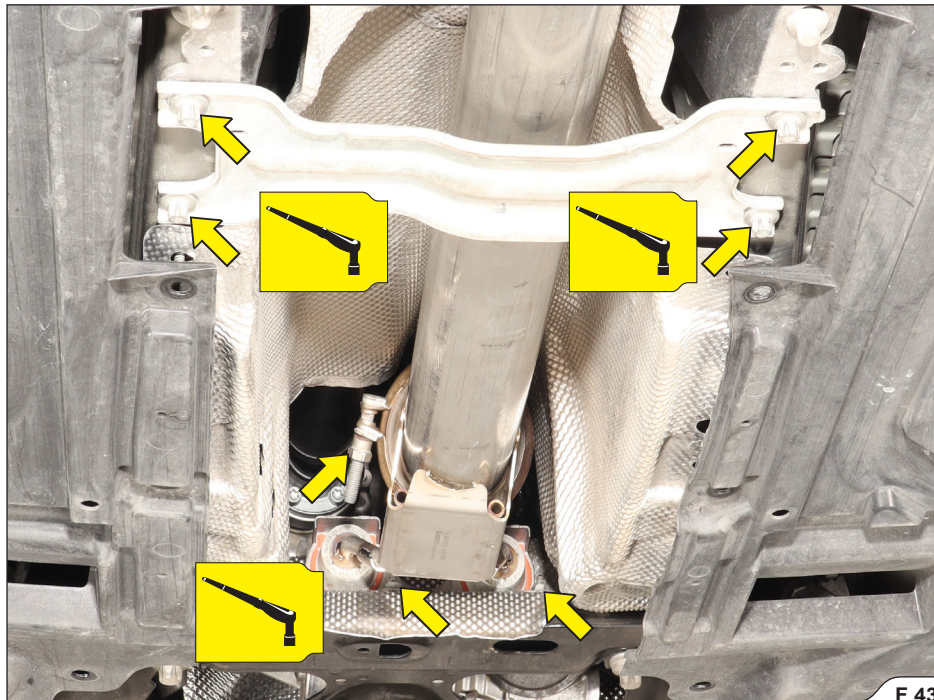


F 43

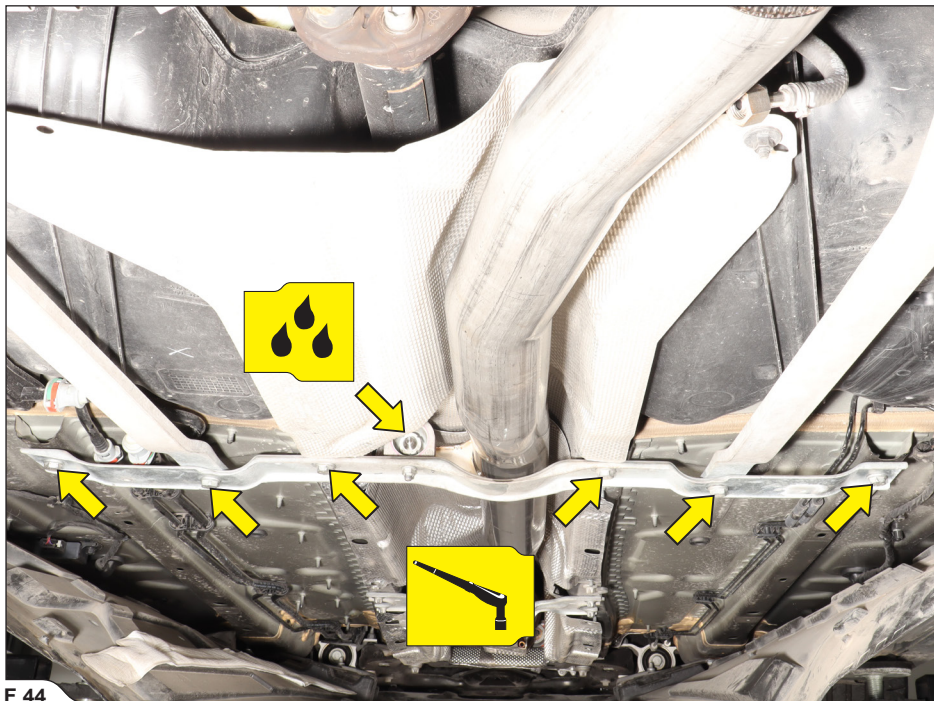

F 44

12. Install the back pressure connection onto Akrapovič link-pipe and tighten it to the specified torque (F 45).


! **CAUTION:** make sure not to injure yourself or damage any part of the vehicle during this process!

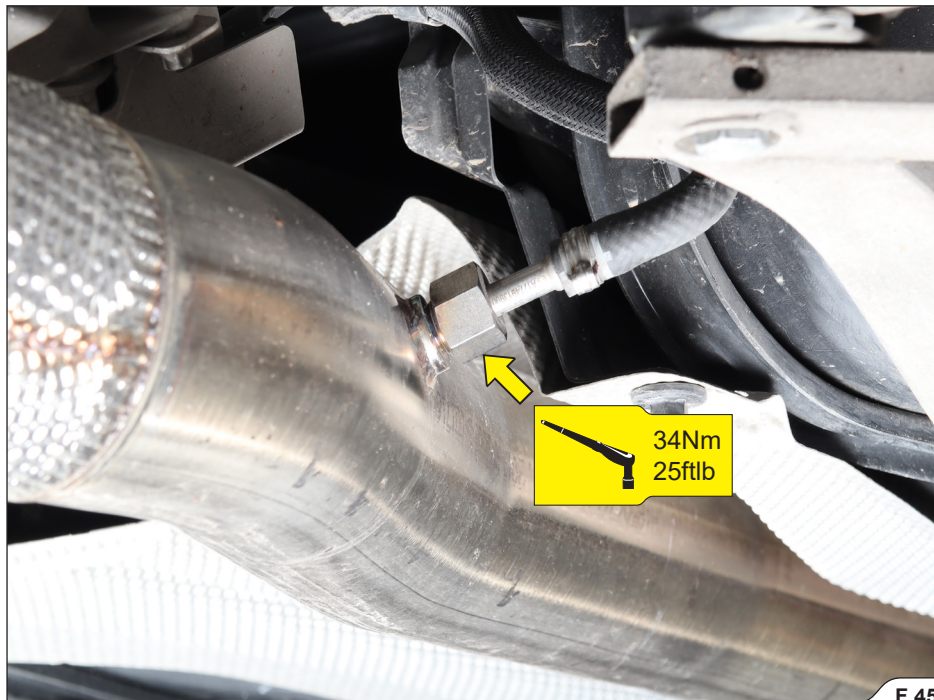

F 45

13. Mount stock rubber brackets and clamp from Akrapovič installation kit onto Akrapovič muffler as shown (F 46).


✚ INSTALLATION TIP: for easier mounting, lubricate the original rubber bracket (WD40®)*.
*WD-40® is a trademark of the WD-40 Company.

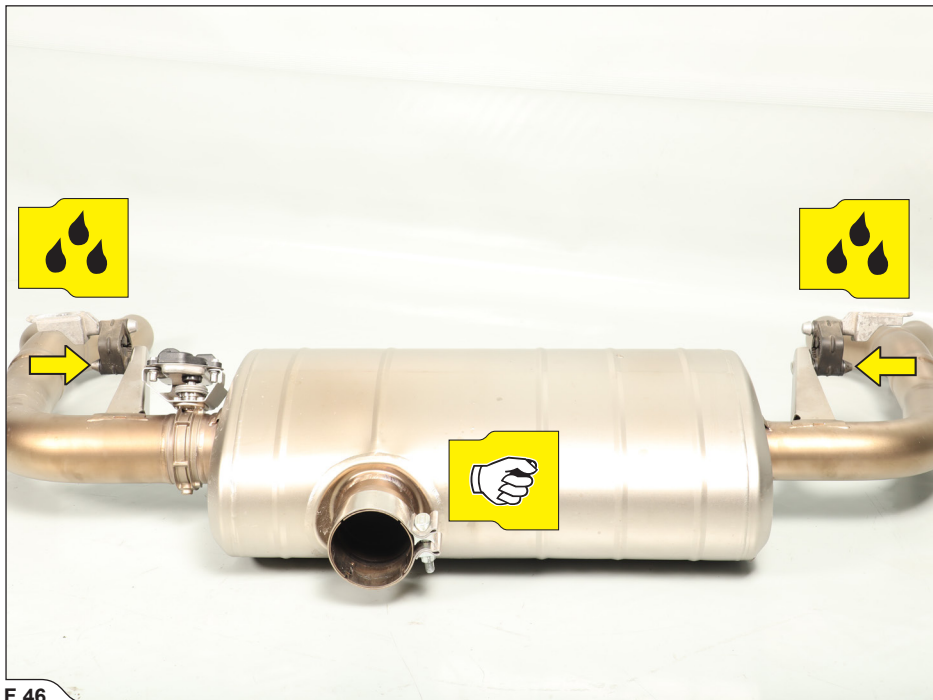

F 46


14. Carefully install the Akrapovič muffler onto the vehicle; tighten and attach all rubber brackets onto the chassis and tighten the clamp from Akrapovič installation kit, to the specified torque (F 47).

! **CAUTION:** make sure not to injure yourself or damage the vehicle or exhaust system during this process!

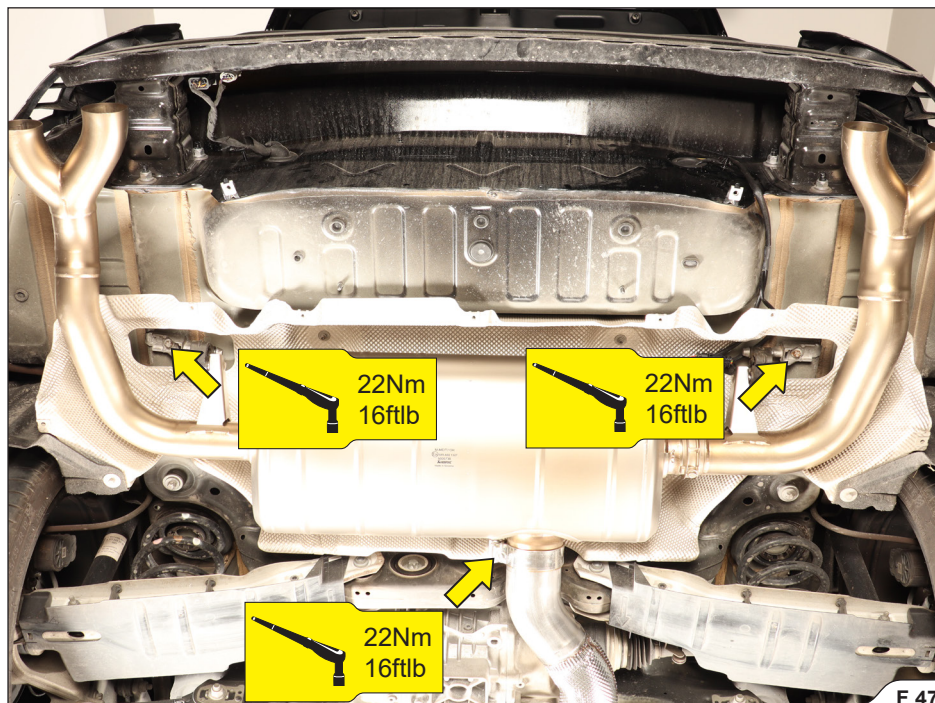


15. Connect the Akrapovič male connector, with stock flap female connector, then connect the akrapovič female connector into the flap actuator, secure wiring and components in place using tie wraps from Akrapovič installation kit (F 48, 49, 50).

! **IMPORTANT:** make sure to secure all Control Kit components in such a way, that they won't touch any hot or moving parts of the vehicle!

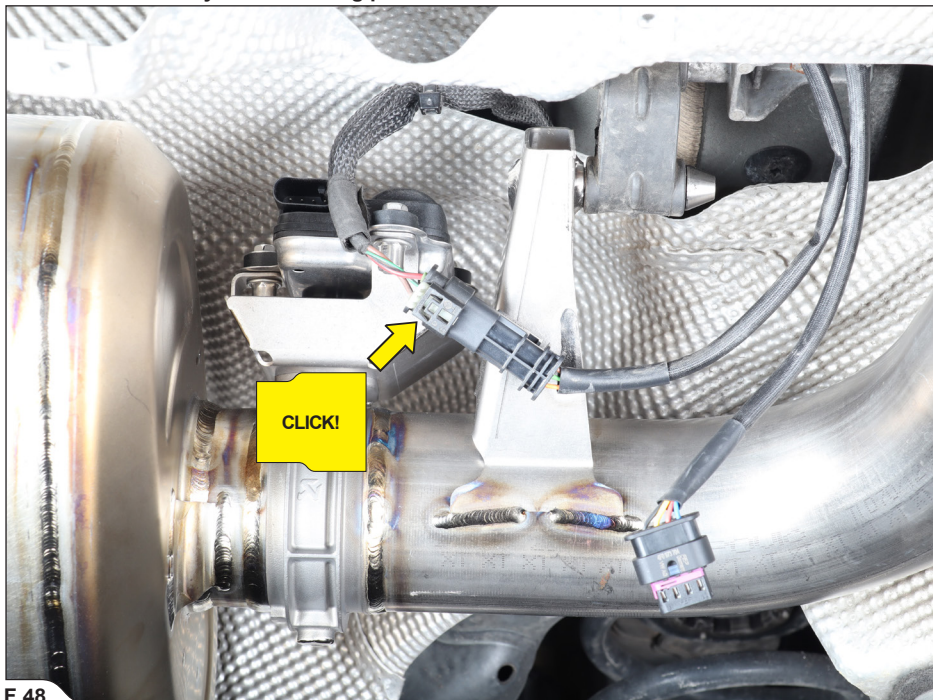

F 48

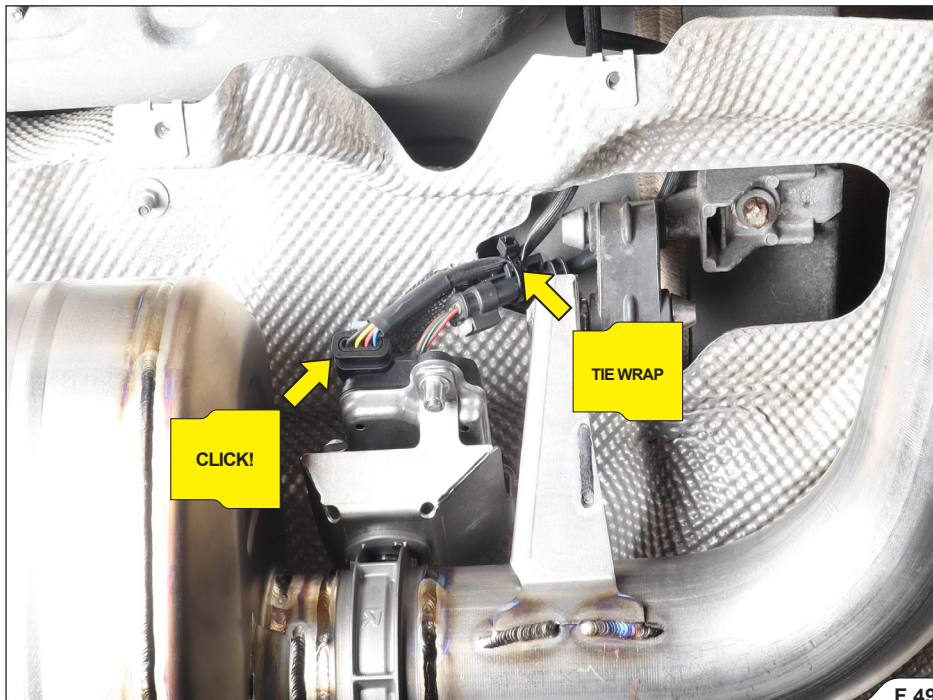

A45 / A 45S
CLA45 / CLA 45S

GLA 45

TIE WRAP

F 50


16. **FOR AMG A45 / A45 S and AMG CLA45 / CLA45 S model only**; assemble and hand tighten Akrapovič tailpipe with stock tailpipe housing (F 51, 52, 53).

! CAUTION: make sure not to injure yourself or damage any part of the exhaust during this process!





F 52

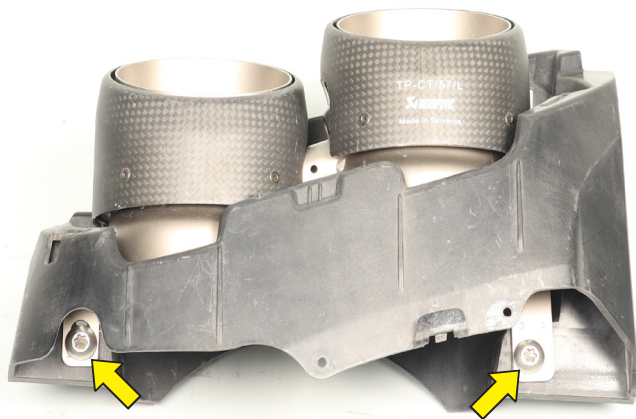

17. **FOR AMG A45 / A45 S and AMG CLA45 / CLA45 S model only**; install the tailpipes into the bumper attaching it with rivets from Akrapovič installation kit; repeat the procedure on both sides of the vehicle (F 54).


! **CAUTION:** make sure not to injure yourself or damage any part of the vehicle during this process!



F 54

18. **FOR AMG A45 / A45 S and AMG CLA45 / CLA45 S model only;** reinstall the bumper back on the vehicle in reverse order that was removed (F 55).


! **CAUTION:** make sure not to injure yourself or damage any part of the vehicle during this process!

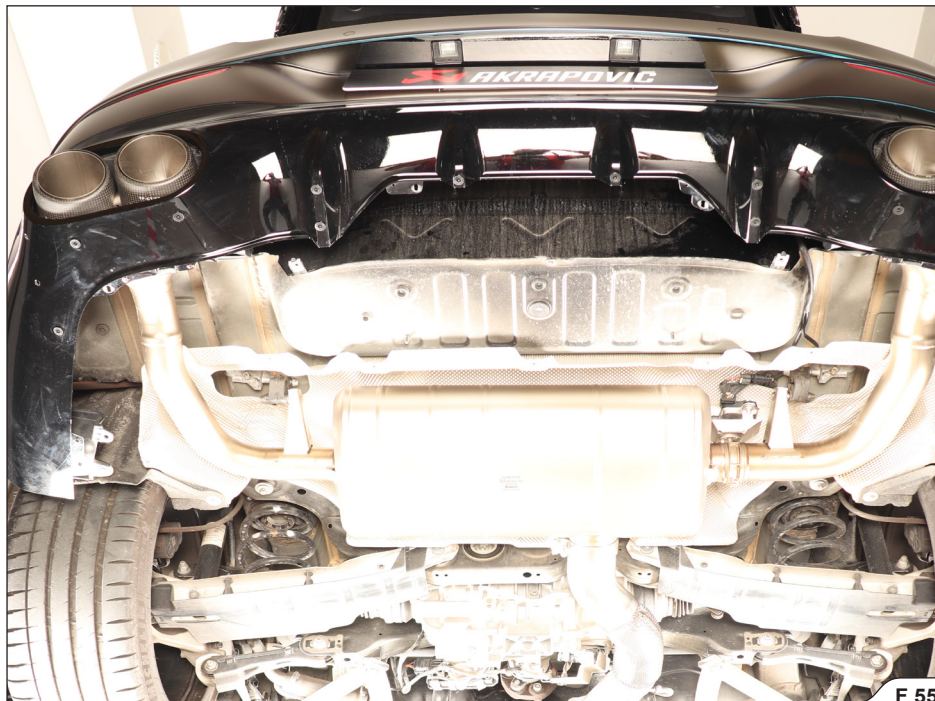

F 55

19. **FOR AMG A45 / A45 S and AMG CLA45 / CLA45 S model only;** center and align the tailpipes in respect to the bumper cutouts and tighten the bolts; check vehicle manufacturer manual for correct procedures and tightening torques (F 56).


! CAUTION: make sure not to injure yourself or damage any part of the vehicle during this process!

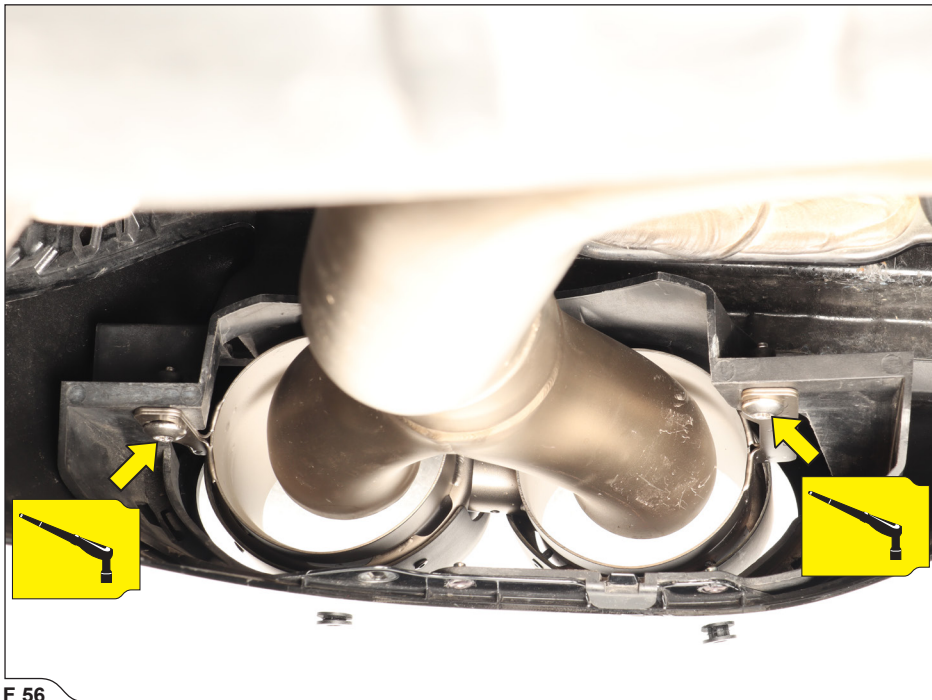

F 56

20. **For AMG GLA 45 model only;** install and hand tighten the tail pipes onto the bumper; make sure, that you attach the marked tail pipes' hooks into the bumper tail pipes' brackets correctly (F 57, 58).

! **IMPORTANT:** make sure, not to damage tail pipes, bumper or any part of the vehicle during this process!

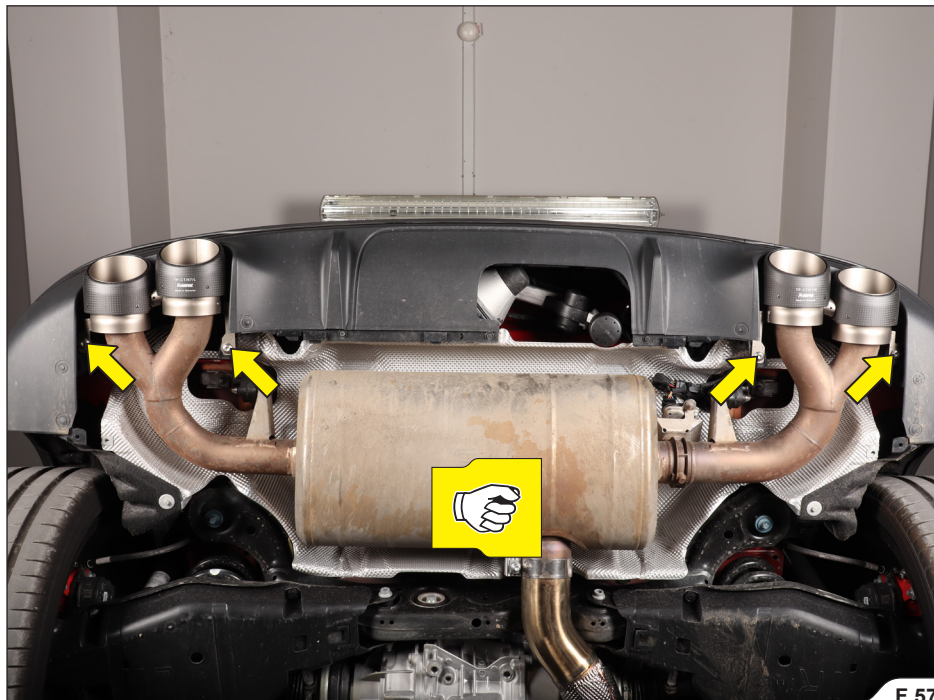


F 57




F 58

21. **For AMG GLA 45 model only**; adjust and center both tail pipes in respect to the bumpers' cutouts and tighten the tail pipes bolts onto the brackets; check vehicle manufacturer manual for correct procedures and tightening torques (F 59, 60).

! **CAUTION:** make sure not to injure yourself, damage the tail pipes or any part of the vehicle during this process!

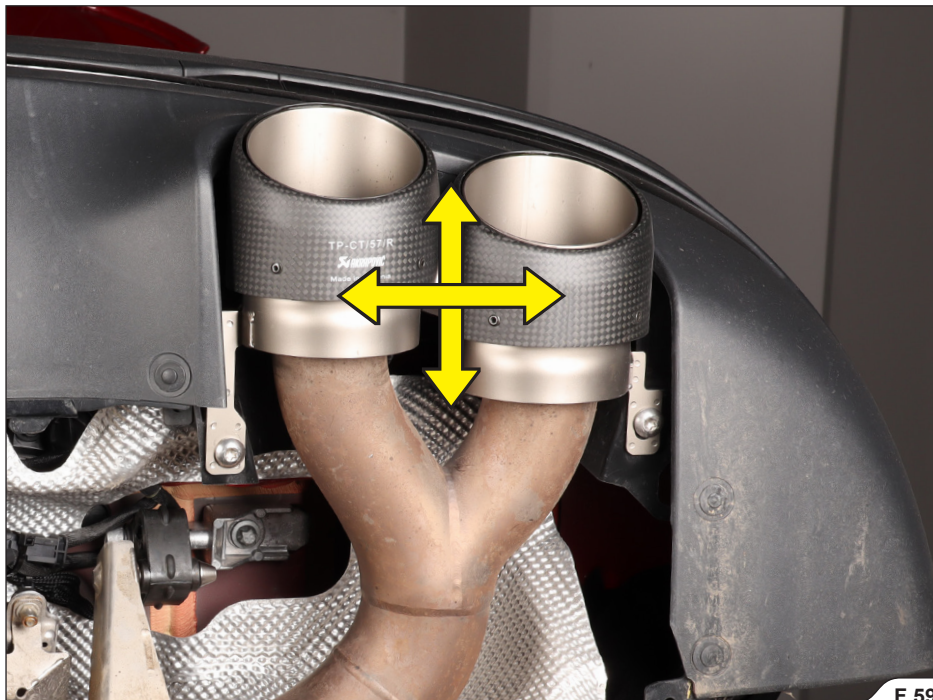

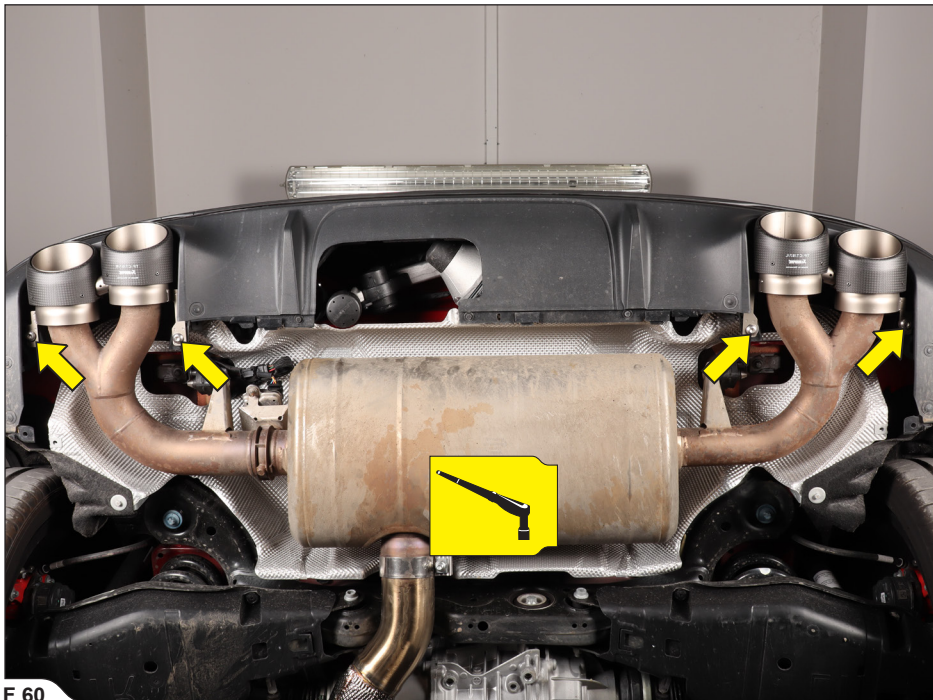

F 60

22. Reinstall all dismantled stock parts; check vehicle manufacturer manual for correct procedures and tightening torques.

! CAUTION: make sure not to injure yourself or damage any part of the vehicle during this process!

[EMPTY PAGE]

FINAL INSTALLATION:

- ! **IMPORTANT:** reinstall the dismantled or partially removed stock parts (wheel arches, bumper etc.); check vehicle manufacturer manual for tightening torques.
- ! **IMPORTANT:** make sure all the nuts and bolts are sufficiently tightened. In case the exhaust system touches the cowl or other parts, repeat the adjustment of the exhaust system or contact your authorized dealer.
- ! **IMPORTANT:** clean all exhaust components before the first start of the engine or the stains will burn onto the surfaces!

MAINTENANCE OF THE AKRAPOVIČ EXHAUST SYSTEM:

1. Clean the titanium exhaust components with a multi-purpose spray lubricant (WD-40[®] or equivalent)*, carbon fiber exhaust components with soft and dry cloth and stainless steel components with soft cloth sprayed with contact cleaner, then wipe with soft and dry cloth. A change in the color of the exhaust system is normal due to high temperatures.
2. Periodically make sure all the bolts and springs are sufficiently tight.

*WD-40[®] is a trademark of the WD-40 Company.

⚡ INSTALLATION TIP: IT IS NORMAL FOR WHITE SMOKE TO COME OUT OF THE MUFFLER AT FIRST OPERATION.

- ! **CAUTION: DO NOT STAND BEHIND THE MUFFLER AT ANY TIME.**
- ! **CAUTION: DO NOT USE AUTOMOTIVE WHEEL CLEANERS OR ANY CLEANING PRODUCTS WHICH CONTAIN ACIDIC ADDITIVES TO CLEAN THE AKRAPOVIČ EXHAUST SYSTEMS.**

WARNING: THE EXHAUST SYSTEM CAN BE EXTREMELY HOT. ALLOW THE EXHAUST AND ENGINE TO COOL DOWN BEFORE BEGINNING INSTALLATION OR ANY OTHER WORK ON THE EXHAUST SYSTEM. THIS MANUAL IS SPECIFIC TO THE MERCEDES-A45 TIPE (W177)/CLA45 (X118/C118). THERE MAY BE SOME DIFFERENCES IN INSTALLATION PROCEDURES FOR OTHER MODELS.

TROUBLESHOOTING:

Problem	Possible cause	Solution
Exhaust gas leaks out of the muffler/pipe clamp connections	loosened clamp	tighten the clamp to specified torque
	connection is not completely joined	tap the connection into place and tighten the clamp to specified torque
Valves are not moving	No supply	Check green LED on the Controller TNG. If the LED is off: <ul style="list-style-type: none">• Check electrical connection and connectors• Check fuse for exhaust valves
	Error detected	Check green LED on the Controller TNG. If the LED is continuously ON: <ul style="list-style-type: none">• There are no errors detected. If the LED is continuously blinking: <ul style="list-style-type: none">• There is an error detected. Connect the Controller TNG to PC via micro USB cable and use Akrapovic tools diagnostic utility, that can be found at http://www.akrapovic.com

DECLARATION OF CONFORMITY OF CONTROLLER TNG

COMPANY: Akrapovič d.d.
ADDRESS: Malo Hudo 8a
1295 Ivančna Gorica, Slovenia

declares that the following products:

Product name: Controller TNG
Trade Name: Akrapovič
Type or model: P-AE100

is in conformity with the requirements of the following Directives of the European Union:
Regulation UN/ECE-R10 rev6



10R -06 1323

FCC NOTICE

This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions: **(1)** This device may not cause harmful interference, and **(2)** this device must accept any interference received, including interference that may cause undesired operation.

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

You can view your product's FCC Declaration of Conformity (DoC) to the FCC 47 CFR Part 15, SubpartB, at: <http://www.akrapovic.com/docs/ControllerTNG/FCCCertification.pdf>.

European Union Directives Conformance Statement

CE Akrapovič d.d. hereby declares that this Akrapovič Controller TNG P-AE100 is in compliance with the essential requirements and other relevant provisions of Directive 2014/30/EU

You can view your product's Declaration of Conformity (DoC) to Directive 2014/30/EU (to EMC Directive) at: <http://www.akrapovic.com/docs/ControllerTNG/CECertification.pdf>.

DECLARATION OF CONFORMITY

COMPANY: Atlan d.o.o.
ADDRESS: Sveti Anton, Hrib 9
6276 Pobegi, Slovenia

declares that the following products:

Product name: Communication Detector
Trade Name: Atlan
Type or model: VTS CAN SNIFFER

is in conformity with the requirements of the following Directives of the European Union:
Regulation UN/ECE-R10 rev5



10 R - 05 1141

FCC NOTICE

This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions: **(1)** This device may not cause harmful interference, and **(2)** this device must accept any interference received, including interference that may cause undesired operation.

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

You can view your product's FCC Declaration of Conformity (DoC) to the FCC 47 CFR Part 15, SubpartB, at <http://www.akrapovic.com/docs/CanSniffer/FCCCertification.pdf>.

Industry Canada compliance statement

This Class B digital apparatus complies with Canadian ICES-003. This device complies with Industry Canada licence-exempt RSS standard(s). Operation is subject to the following two conditions:

(1) this device may not cause interference, and **(2)** this device must accept any interference, including interference that may cause undesired operation of the device.

Cet appareil numérique de la classe B est conforme à la norme NMB-003 du Canada. Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes :

(1) l'appareil ne doit pas produire de brouillage, et **(2)** l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

European Union Directives Conformance Statement

CE Atlán d.o.o. hereby declares that this Atlán Communication Detector VTS CAN SNIFFER is in compliance with the essential requirements and other relevant provisions of Directive 2004/108/EU

You can view your product's Declaration of Conformity (DoC) to Directive 2004/108/EU (to EMC Directive) at <http://www.akrapovic.com/docs/CanSniffer/CECertification.pdf>.

www.akrapovic.com

